
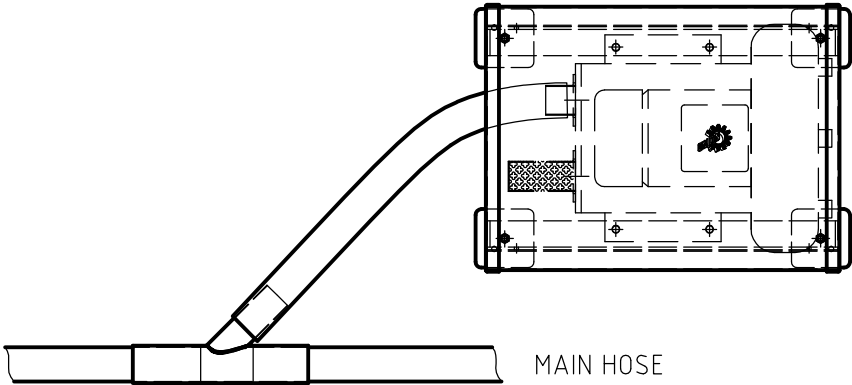


RANGE SERVANT®

<http://www.rangeservant.com>

COMPLEMENTARY BLOWER

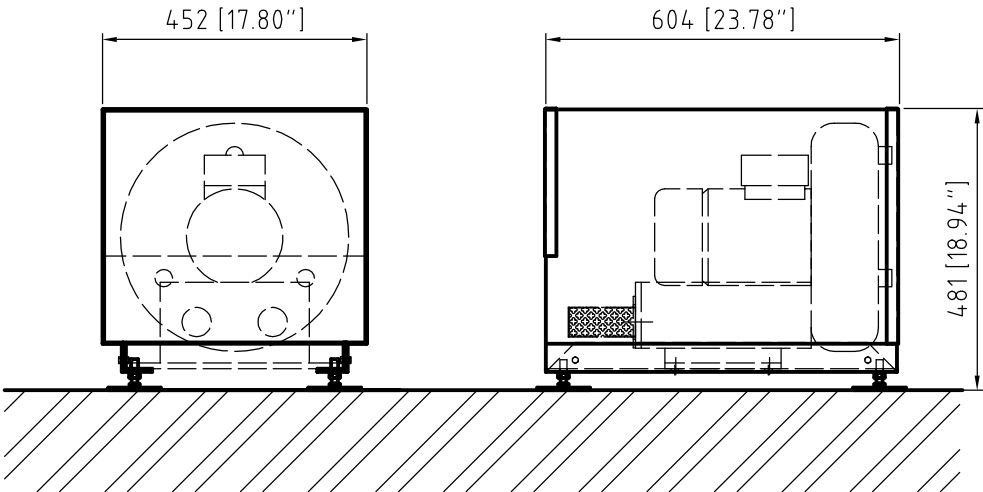

This complementary blow is used to add extra transport distance to an installed system.

MOTOR	2.5 hp	4.5 hp
TRANSP. CAPACITY	400 BALLS/MIN	400 BALLS/MIN
TRANSP. DISTANCE	70 M	100 M
TRANSP. HEIGHT	8 M	10 M
ELECTRICAL DATA, TURBINE	3 ~ 50Hz	3 ~ 50Hz
ELECTRICAL DATA, MOTOR	400V / 4,6 A Y	400V / 6,5 A Y
WEIGHT	80 KG	80 KG
MEASURE LXWXH	805X565X585 MM	805X565X585 MM
MAX. FLUX	210 m ³ /h	350 m ³ /h